


SOLENOID PUMPS

ETG150

TECHNICAL DATA



DIMENSIONS

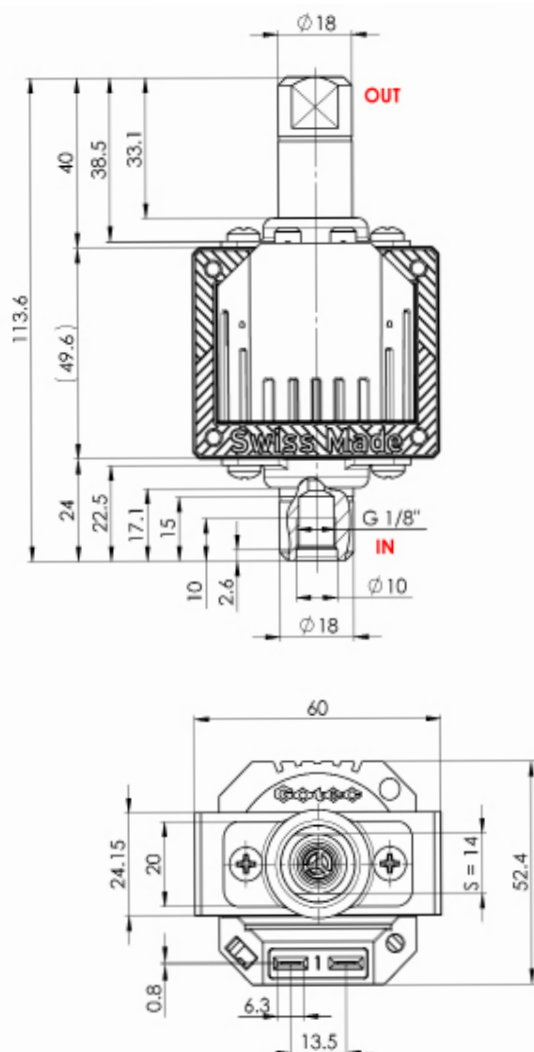

NOMINAL RATED DATA

Max. pressure	14.5[bar]
Max. flow rate	30[l/h]
Max. suction height	1[m]
Viscosity range	1...600[mm ² /s]
Filter	Mesh 100
Tension	230[V] (24, 110V)
Frequency	50, 60[Hz]
Electrical connection	2 x 6.3 x 0.8 [mm]
Power	45[W]
Weight	~560[g]
Temperature	1...50[°C]
Insulation	Class H Class 2
	100% ED / 20 [°C]


SOLENOID PUMPS

ETG150 230V




TECHNICAL
DATA

PERFORMANCES

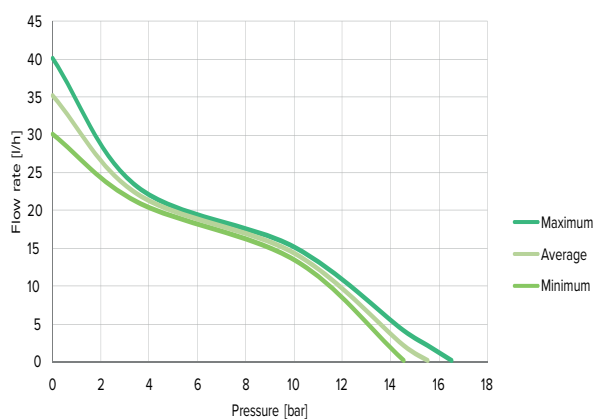


Tested with 20°C of water at ambient temperature

FLOW RATE & TEMPERATURE

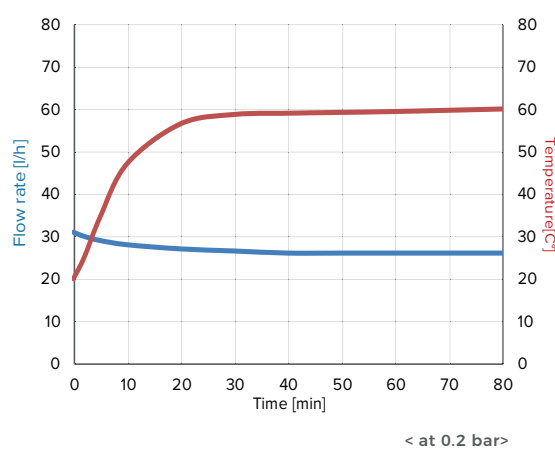


< at 0.2 bar >

ACCESSORIES



Mounting plate

ELECTRIC WIRING DIAGRAM

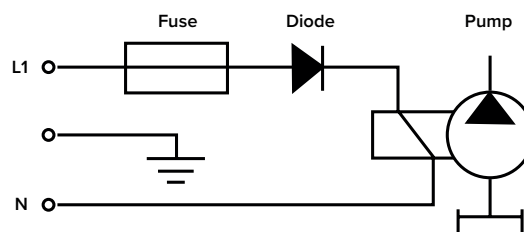

Large choice of materials & options

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications




SOLENOID PUMPS

ETG150 24VAC




TECHNICAL
DATA

PERFORMANCES

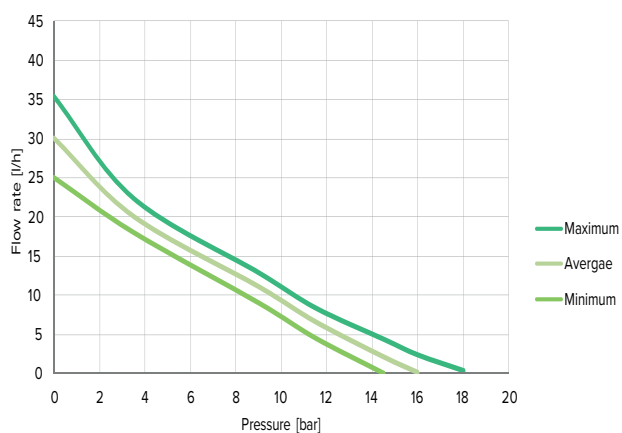

Tested with 20°C of water at ambient temperature

OPEN FLOW & TEMPERATURE

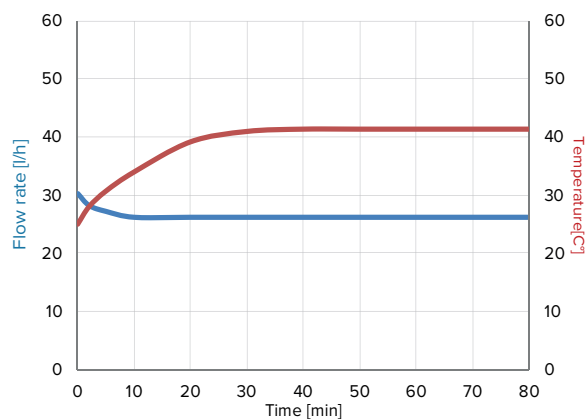


ACCESSORIES



Mounting plate

ELECTRIC WIRING DIAGRAM

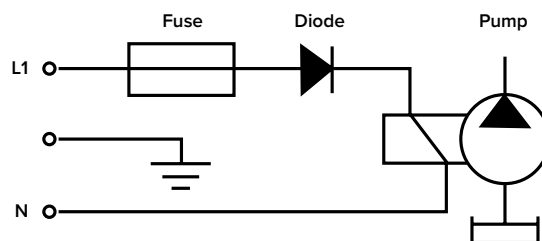

Large choice of materials & options

Please refer to instruction manual for more installation details. For more information, visit our website : www.gotec.ch

Certifications

